

BIKES & E-BIKES

GAMA 2024



WHISTLE



DESCARGAR CATÁLOGO



Atala

ROAD - GRAVEL - ENDURO

Vareo Ultegra DI2 Carbon W	3
Kiowa GRX 800	4
Kiowa GRX 400	5
Geometría Kiowa / Vaero	6
Cheyenne	7

E - FULL SUSPENDED

B-Rush C10.4	9
B-Rush C9.4	10
B-Rush C8.4	11
B-Rush C7.4	12
S-Rush C8.4	13
B-Rush C6.4	14
B-Rush C4.4.....	15
B-Rush C3.4.....	16

B-Rush A7.4	17
B-Rush A6.4	18
B-Rush A5.4	19
B-Rush A4.4	20

E - HARDTAIL

B-Race A9.4	22
B-Race A7.4.....	23
B-Race A7.2 LT.....	24
B-E-Blade	25
B-Race A5.2.....	26

MTB SPORT

B-Cross A5.2.....	28
B-Cross A3.1.....	29
B-Cross A3.2 LT.....	30

E - TREKKING

Speed Urban C8.1 Man	32
Speed Urban C7.2.....	33
B-Tour A7.1 Man / Lady.....	34
B-Tour A6.1 x LT 10 Lady.....	35

B-Tour A5.1 Lady	36
B-Tour A4.1 Lady.....	37

E - URBAN (Central)

Hike.....	39
B-Easy A8.1 S.....	40
B-Easy A7.1 LT.....	41
B-Easy A6.1 LT 10.....	42
B-Cult 7.4 28" / B-Cult 7.4 26"	43
Club.....	44
E-Space 8.4	45

E - URBAN (Rueda)

E-Run 7.1 Lady 500.....	46
E-Run 7.1 Lady 26".....	47
E-Run 6.1 Lady 360.....	48
E-Way.....	49
E-Way 24+	50
Extrafolding 7.1 LTD.....	51
Extrafolding.....	52
E-Folding.....	53

GRAVEL-ROAD

Las bicicletas gravel Whistle son modelos que están diseñadas para ser versátiles y capaces de rodar en diferentes tipos de terreno, desde caminos de grava hasta carreteras pavimentadas y senderos.

En general, las bicicletas Gravel Whistle son una excelente opción para los ciclistas de gravel que buscan una bicicleta versátil y capaz que pueda manejar diferentes tipos de terreno. Con su combinación de materiales de alta calidad, estas bicicletas están diseñadas para ofrecer un rendimiento confiable y duradero.





Frame	Carbon Monocoque, Flat Mount disc brake, tapered 1"1/2 Head Tube, Press Fit 86,5mm, internal cables, 12mm E-thru
Fork	Carbon Monocoque tapered 1"1/2 steering, Flat Mount disc brake, 12mm E-thru
Headset	FSA No.55R custom tapered 1"1/2
Crankset	SH ULTEGRA FC -R8100 Hollowt50/34 BSA (170mm T49-52) (172,5mm T54-56) (175mm T58)
Rear Derailleur	Rd-R8150, Ultegra, 12-Speed, Top Normal, Shadow Design, Direct Attachment,
Front Derailleur	Fd-R8150, Ultegra, For Rear 12-Speed, Down-Swing, Brazed-On Type
Shifters Levers	Shimano Ultegra, St-R8170 Di2 2X12
Brakes	Shimano Ultegra, St-R8170 Hydraulic Disc Brake Flat Mount Rotor CI 160Mm
Cassette	Cs-R8101, Ultegra, 12-Speed, 11-12-13-14-15-17-19-21-24-27-30-34T
Wheels	VISION SC45 full carbon rim - 45mm deph rim -Tubeless ready - Hubs with pull spokes - 28h - 12s
Stem & Handlebar	Vision Metron 5D Acr 100X40 For Size 49-52 Vision Metron 5D Acr 110X42 For Size 54-56 Vision Metron 5D Acr 120X44 For Size 58
Seatpost	Aero Carbon Seat Post 400mm
Saddle	FIZIK Vento Antares Carbon rail (R1) - 140mm
Tyres	Continental Grand Prix 5000S Tr Black/Black



Carbon/Black Matt	
49	0116882000
52	0116882010
54	0116882020
56	0116882030
58	0116882040



Frame	Carbon Monocoque, Flat Mount disc brake, tapered 1"1/2 Head Tube, Press Fit 86,5mm, internal cables, 12mm E-thru
Fork	Carbon Monocoque tapered 1"1/2 steering, Flat Mount disc brake, 12mm E-thru
Headset	FSA No.55R custom tapered 1"1/2
Crankset	Shimano GRX FC-RX810 Hollowtech 2 31/48, BSA
Rear Derailleur	Shimano GRX RD-RX810 11s
Front Derailleur	Shimano GRX FD-RX810
Shifters Levers	Shimano GRX ST-RX810 11x2
Brakes	Shimano GRX BR-RX810 hydraulic disc brake flat mount, Rotor SM-RT86 6-bolt 160mm
Cassette	Shimano Ultegra CS-R8000 11s 11/32
Wheels	Whistle carbon rims C39, 24 spokes, 100/142mm, INT, E-Thru 12mm
Stem	FSA SMR Alu 3D forged 0°
Handlebar	FSA A-Wing AGX Alu, 15° outward bend
Seatpost	Carbon 27,2mm
Saddle	Selle Italia Model X Super Flow
Tyres	Schwalbe G-One Allround 700x40 folding


Carbon/Black Matt

48	0116859000
51	0116859020
54	0116859040
57	0116859060
60	0116859080



Frame	Carbon Monocoque, Flat Mount disc brake, tapered 1"1/2 Head Tube, Press Fit 86,5mm, internal cables, 12mm E-thru
Fork	Carbon Monocoque tapered 1"1/2 steering, Flat Mount disc brake, 12mm E-thru
Headset	FSA No.55R custom tapered 1"1/2
Crankset	Shimano GRX FC-RX8102, 48/31 170mm; BB: Ultegra SMTB7241B
Rear Derailleur	Shimano GRX RD-RX400 10s
Front Derailleur	Shimano GRX FD-RX400
Shifters Levers	Shimano GRX ST-RX400 10x2s
Brakes	Shimano GRX BR-RX400 hydraulic disc brake flat mount, Rotor SM-RT64 CL 160mm
Cassette	Shimano Ultegra CS-HG500 10s 11/34
Wheels	F: MAV.ALL ROAD CL 12X100 R: MAV.ALL ROAD CL HG 12X142
Stem	FSA SMR Alu 3D forged 0°
Handlebar	FSA A-Wing AGX Alu, 15° outward bend
Seatpost	Carbon 27,2mm
Saddle	SELLA WHISTLE PERFORM
Tyres	Schwalbe G-One Allround 700x35

MAVIC

Carbon/Sand Matt

48 0116859105

51 0116859125

Wheels

F: Mav.All Road Cl 12X100 R: Mav.All Road Cl Hg 12X142

SHIMANO

Carbon/Sand Matt

48 0116859100

51 0116859120

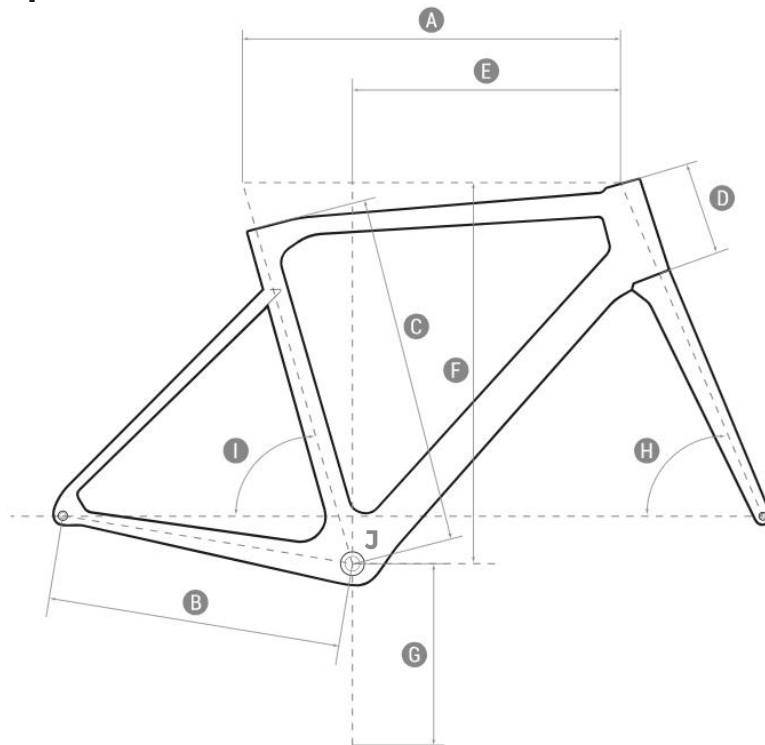
54 0116859140

57 0116859160

60 0116859180

Wheels

Shimano WH-RS171, 28 spokes, 100/142mm, Disc CL, E-Thru 12mm


GRAVEL KIWIA

	SIZES	48-S	51-M	54-L	57-XL
	Rider Height	150-161	161-168	168-178	178-186
A	Top tube	540	560	580	600
B	Base	430	430	430	430
C	Seat Tube	480	510	540	570
D	Head tube	100	115	130	145
E	Reach	390	400	416	426
F	Stack	523	540	554	570
G	BB Height	285	285	285	285
H	Front Angle °	71°	71,5°	72°	72°
I	Seat tube °	74°	73,50°	73,50°	73°

ROAD VAERO

	SIZES	49-XS	52-S	54-M	56-L	58-XL
	Rider Height	158-165	166-174	172-180	178-186	184-192
A	Top tube	510	530	550	565	585
B	Base	408	408	408	408	408
C	Seat Tube	470	490	510	530	550
D	Head tube	105	120	140	160	190
E	Reach	374	385,4	393,7	397,3	403,1
F	Stack	507	524	544	566	594
G	BB Height	285	285	285	285	285
H	Front Angle °	71°	72°	72,5°	73°	73,50°
I	Seat tube °	75°	74,5°	74°	73,50°	73°
J	Wheelbase	972	979	990	997	1010



Frame	Full Carbon 29", Toray T700, Internal routing, Rear travel 150 mm, 12x148 mm E-Thru
Fork	Fox 36 Performance eMTB+, 160 mm, Air, 1.5 Tapered. FIT4, 15x110 mm
Rear Shock	Float X, Performance, EVOL, LSR, 2 Pos-Lever, 230x65
Headset	FSA No.55R custom tapered 1"1/2
Crankset	Shimano Deore XT FC-M8100, 12s, Hollowtech 2, crank 170 mm, 30T)
Rear Derailleur	Shimano XT RD-M8100 SGS, Shadow Plus
Shifters Levers	Shimano SLC SL-M-7100, Rapidfire-Plus, 12s
Brakes	Shimano XT BR-M8120, Four piston, Rotor RT-MT800 203 mm / 203 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full+
Wheels	Shimano XT WH-M620
Stem	Satori Ursa, 35 mm, Internal routing
Handlebar	Race Face Chester, 780 mm, Rise 20
Seatpost	Dropper Alpha 1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	F: Schwalbe Magic Mary Evo, Addix Soft, Super Trail, 29"x2,60" R: Schwalbe Hans Dampf Evo, Addix Soft, Super Trail, 29"x2,60"
7	

Black/Green/Red	
40	0116876000
44	0116876010
48	0116876020
52	0116876030

E-FULL SUSP

B-Rush 2024

Nuestros nuevos cuadros B-Rush 2024 nacen de un proyecto exclusivo para la marca Whistle:

- * Nuevo diseño. El diseño de las formas y la ingeniería de los moldes se realiza a propósito por nuestro personal técnico.
- * Materiales de última generación. La resistencia, la ligereza y el confort están garantizados por la fibra de carbono T700, obtenido a través de procesos de muy alta temperatura y elegido por su alto rendimiento mecánico asociado con bajo peso.
- * Producción inteligente. Producido a través de las tecnologías más modernas en el campo de los materiales compuestos, que permiten optimizar los tiempos de producción de cada cuadro.
- * ¿El resultado? Un producto con prestaciones únicas, capaz de satisfacer a los usuarios más exigentes, en el mejor precio de mercado.



Cabalga hasta la cima y ataca rápidamente los descensos más técnicos a la máxima velocidad. Están contruidos para competiciones pero gracias a las resistentes suspensiones, son ágiles y divertidos incluso en senderos cercanoscasa.



WHISTLE**B-Rush C10.4****PVP: 8.399 €****Enero 2024****BOSCH****The smart system**

Frame	Full Carbon 29", Toray T700, Integrated battery, Tapered, Internal routing, Rear travel 160 mm, 12x148 mm E-Thu
--------------	---

Fork	Fox 38 Float Factory eMTB+, Air, FIT4, 29", Travel 160 mm, 1,5 Tapered, 15x110 mm
-------------	---

Rear Shock	Fox Float X2 Factory, EVOL, LSR, HSR, 2 Pos-Lever, 230x65
-------------------	---

Headset	Acros for Ursa, 1,5", Internal routing
----------------	--

Crankset	Miche Black Box, FSA 36T MegaTooth
-----------------	------------------------------------

Rear Derailleur	Shimano XT RD-M8100 SGS, Shadow Plus
------------------------	--------------------------------------

Shifters Levers	Shimano XT SL-M8100 RapidfirePlus, 12s
------------------------	--

Brakes	Shimano XT BR-M8120, Four piston, Rotor RT-MT800 203 mm / 203 mm
---------------	--

Cassette	Shimano CS-M8100 12s 10/51
-----------------	----------------------------

Pedals	Alu MTB Full+
---------------	---------------

Wheels	Mavic E-Deemax 29"
---------------	--------------------

Stem	Satori Ursa, Barbore 35 mm
-------------	----------------------------

Handlebar	Race Face Chester, 780 mm, Barbore 35, Rise 20
------------------	--

Seatpost	Race Face Transfer Factory Kashima, 31,6 mm, remote
-----------------	---

Saddle	Whistle Performance
---------------	---------------------

Tyres	Vittoria Mazza 29"x2,60"
--------------	--------------------------

Motor	Bosch Smart System Perf. 36 V, 250 W
--------------	--------------------------------------

Max Torque	85 Nm
-------------------	-------

Sensor Type	Torque
--------------------	--------

Battery	PowerTube 750 Horizontal, frametype, weight 4,2 kg
----------------	--

Charger Type	4 A
---------------------	-----

Charger Time	Up to 6 hours
---------------------	---------------

Max Assisted Speed	25 km/h
---------------------------	---------

Display	Kiox 300 + Led Remote
----------------	-----------------------

Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %
--------------	---

Black/ Gold

40	0116862000
-----------	------------

44	0116862010
-----------	------------

48	0116862020
-----------	------------

52	0116862030
-----------	------------



Frame	Full Carbon 29", Toray T700, integrated battery, internal routing, Rear travel 150 mm, 12x148 mm E-Thu	Motor	Bosch Smart System Perf. CX 36 V, 250 W
Fork	Fox 38 Float Factory eMTB+, 160 mm Air, 1.5 Tapered, FIT4, 15x110 mm	Max Torque	85 Nm
Rear Shock	Fox Float X2 Performance Elite, EVOL, LSR, HSR, 2 pos lever, 230x6	Sensor Type	Torque
Headset	Acros for Ursa, 1,5", Internal routing	Battery	PowerTube 750 Horizontal, frametype, weight 4,2 kg
Crankset	Miche Black Box, FSA 36T MegaTooth	Charger Type	4 A
Rear Derailleur	Shimano XT RD-M8100 SGS, Shadow Plus	Charger Time	Up to 6 hours
Shifters Levers	Shimano XT SL-M8100 Rapidfire-Plus, 12s	Max Assisted Speed	25 km/h
Brakes	Shimano XT BR-M8120, Four piston, Rotor RT-MT800 203 mm / 203 mm	Display	Kiox 300 + Led Remote
Cassette	Shimano CS-M6100 12s 10/51	Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %
Pedals	Alu MTB Full+		
Wheels	Mavic E-Crossride		
Stem	Satori Ursa, 35 mm, Internal routing		
Handlebar	Race Face Chester, 780 mm, Rise 20		
Seatpost	Dropper Alpha 1, 31,6 mm, remote		
Saddle	Whistle Performance		
Tyres	F: Schwalbe Magic Mary Evo, Addix Soft, Super Trail, 29"x2,60" R: Schwalbe Eddy Current Rear Evo, Addix Soft, Super Gravity, 29"x2,60"⊠		
		Black/ Red	
		44	0116868910
		48	0116868920



Frame	Full Carbon 29", Toray T700, Integrated battery, Tapered, Internal routing, Rear travel 160 mm, 12x148 mm E-Thu	Motor	Bosch Smart System Perf. CX 36 V, 250 W
Fork	Fox 36 Float Performance eMTB+, Air, GRIP, 29", Travel 160mm, 1.5 Tapered, 15x110mm	Max Torque	85 Nm
Rear Shock	Fox Float X Performance, EVOL, LSR, 2 Pos-Lever, 230x66	Sensor Type	Torque
Headset	Acros for Ursa, 1.5", Internal routing	Battery	PowerTube 750 Horizontal, frametype, weight 4,2 kg
Crankset	Miche Black Box, FSA 36T MegaTooth	Charger Type	4 A
Rear Derailleur	Shimano XT RD-M8100 SGS, Shadow Plus	Charger Time	Up to 6 hours
Shifters Levers	Shimano SLX SL-M7100 Rapidfire Plus, 12s	Max Assisted Speed	25 km/h
Brakes	Magura MT5, Four piston, Rotor RT30 203 mm / 203 mm	Display	Kiox 300 + Led Remote
Cassette	Shimano CS-M6100 12s 10/51	Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %
Pedals	Alu MTB Full+	Black/ Red	
Wheels	Mavic E-Crossride 29"	40	0116862200
Stem	Satori Ursa, Barbore 35 mm	44	0116862210
Handlebar	Alu, 780 mm, 35mm, Rise 15mm	48	0116862220
Seatpost	Dropper Alpha 1, 31.6 mm, remote	52	0116862230
Saddle	Whistle Performance		
Tyres	F: Schwalbe Magic Mary Evo, Addix Soft, Super Trail, 29"x2,60" R: Schwalbe Hans Dampf Evo, Addix Soft, Super Trail, 29"x2,60"		



Frame	Full Carbon 29", Toray T700, Integrated battery, Tapered, Internal routing, Rear travel 160 mm, 12x148 mm EThru
Fork	Rock Shox Domain RC e-MTB, DebonAir, 29", Travel, 150 mm, 1.5 Tapered, Max Lite 15x110 mm
Rear Shock	Rock Shox Deluxe Select R, DebonAir, 230x65 mm
Headset	Acros for Ursa, 1.5", Internal routing
Crankset	Miche Black Box, FSA 34T MegaTooth
Rear Derailleur	Shimano XT RD-M8100 SGS, Shadow Plus
Shifters Levers	Shimano SLX SL-M7100 Rapidfire-Plus, 12s
Brakes	Shimano BR-MT420, Four piston, Rotor RT30 203 mm / 203
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full+
Front Hub	Shimano TC500B, 15x110, CL, 32h / Glory Wheel, 15x110, CL, 32h
Rear Hub	Shimano TC500B, 12x148, CL, MicroSpline, 32h/Formula, 12x148, CL, MicroSpline
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper Alpha 1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Nobby Nic, Performance, Addix, 29"x2,60"

Motor	Bosch Smart System Perf. CX Race, 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	PowerTube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Charger Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	Kiox 300 + Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Black/ Green

40	0116862305
44	0116862315
48	0116862325
52	0116862335



Frame	Full Carbon 29", Toray T700, Integrated battery, Tapered, Internal routing, Rear travel 150 mm, 12x148 mm EThru
Fork	Rock Shox Domain RC e-MTB, Maxle Lite 15x110 mm, DebonAir, 1.5 tapered
Rear Shock	Rock Shox RS Deluxe Select R, 230x65 mm
Headset	FSA No. 57B tapered 1 1/2
Crankset	FSA, 36T Megatooth
Rear Derailleur	Shimano XT RD-M8100 SGS, Shadow Plus
Shifters Levers	Shimano Deore SL-M6 100 Rapidfire - Plus, 12s, I-spec
Brakes	Shimano BR-MT420, Four piston, Rotor RT30 203 mm / 203
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full+
Front Hub	Shimano Alivio MT410B, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT410B, 15x110, CL, 32h Microspline, 32h
Handlebar	Rise Alu Oversize 780 mm
Seatpost	Dropper Alpha 1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Tough Tom, R: Schwalbe Rapid Rob, 29"x2,6"

Motor	EP800, 36V, 250W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Darfon 720 Wh, frame type, weight 3,8 kg
Charger Type	4 A
Charger Time	Up to 5 hours
Max Assisted Speed	25 km/h
Display	SC-EM800
Power	Livello assistenza personalizzabile l'App E-TUBE PROJECT

Black/ Blue

40	0116850900
44	0116850910
48	0116850920
52	0116850930



Frame	Full Carbon 29", Toray T700, Integrated battery, Tapered, Internal routing, Rear travel 160 mm, 12x148 mm E-Thru
Fork	Rock Shox 35 Gold RL e-Bike, DebonAir, Motion Control, Lockout, 29", Travel 160 mm, 1.5 Tapered, Maxle Lite 15x110 mm
Rear Shock	Rock Shox Deluxe Select R, DebonAir, 230x65 mm
Headset	Acros for Ursa, 1,5", Internal routing
Crankset	Sram, 34T X-Sync2
Rear Derailleur	Sram, 34T X-Sync2
Shifters Levers	Sram SX Eagle Single Click Trigger, 12s
Brakes	Magura MT5, Four piston, Rotor RT30 203 mm / 203 mm
Cassette	Sram PG1210 Eagle 12s, 11/50
Pedals	Alu MTB Full+
Front Hub	Shimano TC500B, 15x110, CL, 32h / Glory Wheel, 15x110, CL, 32h
Rear Hub	Shimano TC500B, 12x148, CL, HG, 32h / Glory Wheel, 12x148, CL, HG, 32h
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper Alpha 1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Nobby Nic, Performance, Addix, 29"x2,60"

Motor	Bosch Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	PowerTube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Charger Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	Purion 200
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Black/ Silver

40	0116862400
44	0116862410
48	0116862420
52	0116862430



Frame	Full Carbon 29", Toray T700, Integrated battery, Tapered, Internal routing, Rear travel 160 mm, 12x148 mm E-Thu
Fork	Rock Shox 35 Gold RL e-Bike, DebonAir, Motion Control, Lockout, 29", Travel 150 mm, 1.5 Tapered, Maxle Lite 15x110 mm
Rear Shock	Rock Shox Deluxe Select R, DebonAir, 230x65 mm
Headset	Acros for Ursa, 1.5", Internal routing
Crankset	FSA 34T
Rear Derailleur	Shimano Deore RD-M6100 SGS, Shadow Plus
Shifters Levers	Shimano Deore SL-M6100 Rapidfire Plus, 12
Brakes	Shimano BR-MT420, Four piston, Rotor SM-RT30 203 mm / 203 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full+
Front Hub	Shimano TC500B, 15x110, CL, 32h / Glory Wheel, 15x110, CL, 32h
Rear Hub	Shimano TC500B, 15x110, CL, 32h / Glory Wheel, 15x110, CL, 32h
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper Alpha 1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Tough Tom 29", 2,6

Motor	Bosch Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	PowerTube 650 Horizontal, frametype, weight 3,5 kg
Charger Type	4 A
Charger Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Febrero 2024

Black/ Silver		Black/ Black	
40	0116862600	44	0116862615
44	0116862610	48	0116862625
48	0116862620		
52	0116862630		

WHISTLE**B-Rush C3.4**

PV P:5.359 €

The smart
system

Frame	Full Carbon 29", Toray T700, Integrated battery, Tapered, Internal routing, Rear travel 160 mm, 12x148 mm EThru
Fork	Rock Shox 35 Silver TK eBike, Solo Air, Lockout, 29", Travel 150 mm, 1.5 tapered, Maxle lite 15x110 mm
Rear Shock	Rock Shox Deluxe Select R Debon Air, 230x65 mm
Headset	Acros for Ursa, 1.5", Internal routing
Crankset	FSA, 34T
Rear Derailleur	Shimano Deore SL-M6100 SGS Shadow Plus, 12s
Shifters Levers	Shimano Deore SL-M6 100 Rapidfire - Plus, 12s, I-spec
Brakes	Magura MT5, Four piston, Rotor RT30 203 mm / 203 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full+
Wheels	Rodi Tryp39 29"
Stem	Satori Ursa, Barbore 35 mm
Handlebar	Rise Alu Oversize 780 mm
Seatpost	Dropper Alpha 1, Diam 31.6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Tough Tom 29"x2,6"

Motor	BOSCH Smart System Performance Line CX, 36 V, 250W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Smart System, Powertube 750 Horizontal weight 4.3 kg
Charger Type	2 A
Charger Time	Up to 9 hours
Max Assisted Speed	25 km/h
Display	Smart System Purion 200
Power	Eco: 60% Tour+: 60-340% EMTB: 140-340% Turbo: 340%

Black/ Black		Black/ Gold	
40	0116870402	44	0116870410
44	0116870412	52	0116870434
48	0116870420		
52	0116870430		



Frame	Alu 29", Gravity casting, Integrated battery, Tapered, Internal routing, Rear travel 156 mm, 12x148 mm E-Thru
Fork	Rock Shox 35 Gold RL e-Bike, DebonAir Motion Control, Lockout, 29", Travel 150 mm, 1.5 Tapered, Maxle Lite 15x110 mm
Rear Shock	Rock Shox Deluxe Select R, DebonAir, 230x65 mm
Headset	Acros for Ursa, 1.5", Internal routing
Crankset	FSA 34T, Megatooth
Rear Derailleur	Shimano Deore RD-M6100 SGS Shadow Plus, 12s
Shifters Levers	Shimano Deore SL-M6100 Rapidfire-Plus, 12
Brakes	Shimano BR-MT420, Four piston, Rotor SMRT30 203 mm / 203 mm
Cassette	Shimano CS-M6100, 12s, 10/51
Pedals	Alu MTB Full+
Front Hub	Shimano TC500B, 15x110, CL, 32h / Glory Wheel, 15x110, CL, 32h
Rear Hub	Shimano TC500B, 12x148, CL, MicroSpline, 32h / Formula, 12x148, CL, MicroSpline, 32h
Handlebar	Alu, 780 mm, Barbore 35mm, Rise 15mm
Seatpost	Dropper Alpha1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Nobby Nic, Performance, Addix, 29"x2,60"

Motor	Bosch Smart System Perf. CX Race, 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	PowerTube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Charger Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	Led remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Red	
40	0116871405
44	0116871415
48	0116871425
52	0116871435



Frame	Alu 29", Gravity casting, Integrated battery, Tapered, Internal routing, Rear travel 156 mm, 12x148 mm E-Thu
Fork	Rock Shox 35 Silver TK e-Bike, Solo Air Lockout, 29", Travel 150 mm, 1.5 Tapered, Maxle Lite 15x110 mm
Rear Shock	Rock Shox Deluxe Select R, DebonAir, 230x65 mm
Headset	Acros for Ursa, 1.5", Internal routing
Crankset	Sram, 34T X-Sync2
Rear Derailleur	Sram SX Eagle, 12s
Shifters Levers	Sram SX Eagle, 12s Single Click Trigger, 12s
Brakes	Shimano BR-MT420, Four piston, Rotor SMRT30 203 mm / 203 mm
Cassette	Sram PG1210 Eagle, 12s, 11/50
Pedals	Alu MTB Full+
Front Hub	Shimano TC500B, 15x110, CL, 32h / Glory Wheel, 15x110, CL, 32h
Rear Hub	Shimano TC500B, 12x148, CL, HG, 32h / Glory Wheel, 12x148, CL, HG, 32h
Handlebar	Alu, 780 mm, Barbore 35mm, Rise 15mm
Seatpost	Dropper Alpha1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Nobby Nic, Performance, Addix, 29"x2,60"

Motor	Bosch Smart System Perf. CX Race, 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	PowerTube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Charger Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	Purion 200
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Petroleum	
40	0116871500
44	0116871510
48	0116871520
52	0116871530



Frame	Alu 29", Gravity casting, Integrated battery, Tapered, Internal routing, Rear travel 156 mm, 12x148 mm E-Thu
Fork	Rock Shox 35 Silver TK e-Bike, Solo Air Lockout, 29", Travel 150 mm, 5 Tapered, Maxle Lite 15x110 mm
Rear Shock	Rock Shox Deluxe Select R, DebonAir, 230x65 mm
Headset	Acros for Ursa, 1.5", Internal routing
Crankset	FSA 34T
Rear Derailleur	Shimano Deore RD-M6100 SGS, Shadow Plus, 12s
Shifters Levers	Shimano Deore SL-M6100 Rapidfire-Plus, 12s
Brakes	Shimano BR-MT420, Four piston, Rotor SMRT30 203 mm / 203 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full+
Front Hub	Shimano TC500B, 15x110, CL, 32h / Glory Wheel, 15x110, CL, 32h
Rear Hub	Shimano TC500B, 12x148, CL, MicroSpline, 32h / Formula, 12x148, CL, MicroSpline, 32h
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper Alpha1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Nobby Nic, Performance, Addix, 29"x2.60"

Motor	Bosch Smart System Perf. CX Race, 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	PowerTube 625 Horizontal, frametype, weight 3,5 kg
Charger Type	4 A
Charger Time	Up to 9 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Red	
40	0116871600
44	0116871610
48	0116871620
52	0116871630



Frame	Alu 29", Gravity casting, Integrated battery, Tapered, Internal routing, Rear travel 156 mm, 12x148 mm E-Thru
Fork	RST Vibe TNL, Coil, Lockout, 29", Travel 10 mm, 1.5 Tapered, 15x10
Rear Shock	Rock Shox Deluxe Select R, DebonAir, 230x65 mm
Headset	Acros for Ursa, 1.5", Internal routing
Crankset	FSA 34T
Rear Derailleur	Shimano CUES RD-U6000 Shadow, 10s
Shifters Levers	Shimano CUES SL-U6000 Rapidfire Plus, 10s
Brakes	Shimano BR-MT420, Four piston, Rotor SMRT30 203 mm / 203 mm
Cassette	Shimano CUES CS-LG300, 10s, 11/48
Pedals	Alu MTB Full+
Front Hub	Shimano TC500B, 15x110, CL, 32h / Glory Wheel, 15x110, CL, 32h
Rear Hub	Shimano TC500B, 12x148, CL, HG, 32h / Glory Wheel, 12x148, CL, HG, 32h
Handlebar	Alu, 780 mm, Barbore 35mm, Rise 15mm
Seatpost	Dropper Alpha1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Nobby Nic, Performance, Addix, 29"x2.60"

Motor	Bosch Smart System Perf. CX Race, 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	PowerTube 625 Horizontal, frametype, weight 3,5 kg
Charger Type	4 A
Charger Time	Up to 9 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Petroleum	
40	0116871700
44	0116871710
48	0116871720
52	0116871730
Red	
40	0116871800
44	0116871810
48	0116871820
52	0116871830

E-HARDTAIL

¿Hardtail o full suspension? He aquí la cuestión. Los bikers amantes de la montaña siempre debaten qué tipo de bici es mejor. La verdad es que cada bicicleta te permite rodar de forma diferente

Caminos de tierra, subidas para afrontar con agilidad, descensos desafiantes. Nuestras eMtbs rígidas y de suspensión total son perfectas para afrontar cualquier tipo de sendero.

Las bicicletas hardtail te llevan a buscar tus límites (más que una bicicleta de suspensión completa) y te ayudan a refinar tus habilidades. Si crees que es el momento de atacar senderos con nuevas líneas desde la perspectiva de una hardtail, echa un vistazo a nuestra selección y descubre nuestras bicicletas.



BOSCH





Frame	Alu 29", Gravity casting, Integrated battery, Tapered, Internal routing, Rear travel 156 mm, 12x148 mm E-Thru
Fork	Suntour XCR32-Boost, Coil, Lockout, 29", Travel 120 m, 1.5 Tapered, 15x110
Headset	Acros for Viper, 1.5", Internal routing
Crankset	FSA 34T, Megatooth
Rear Derailleur	Shimano Deore RD-M6100 SGS Shadow Plus, 12s
Shifters Levers	Shimano Deore SL-M6100 Rapidfire Plus, 12s, I-spec
Brakes	Shimano BR-MT200, Rotor SM-RT30 180 mm / 180 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB
Front Hub	Shimano TC500B, 15x110, CL, 32h / Glory Wheel, 15x110, CL, 32h
Rear Hub	Shimano TC500B, 12x148, CL, MicroSpline, 32h/Formula, 12x148, CL, MicroSpline, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper Alpha1, 31,6 mm, remote
Saddle	Selle Royal Sauris
Tyres	Schwalbe Smart Sam, Performance, Addix, 29"x2.35" / Vittoria Barzo

Motor	Bosch Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	PowerTube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Charger Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Anthracite/Gold

40	0116867500
46	0116867510
52	0116867520



Frame	Alu 29", Gravity casting, Integrated battery, Tapered, Internal routing, 12x148 mm E-Thru
Fork	Suntour XCM, Coil, Lokcut, 29", Travel 100 mm, QR / Zoom 860 AMS, Travel 100
Headset	Acros for Viper, 1.5", Internal routing
Crankset	FSA 34T
Rear Derailleur	Shimano CUES RD-U6000 GS Shadow, 10s
Shifters Levers	Shimano CUES SL-U6000 Rapidfire Plus, 10s
Brakes	Shimano BR-MT200, Rotor SM-RT30 180 mm / 180 mm
Cassette	Shimano CUES CS-LG300, 10s, 11/48
Pedals	Alu MTB
Front Hub	Shimano TC500B, 15x110, CL, 32h / Glory Wheel, 15x110, CL, 32h
Rear Hub	Shimano TC500B, 12x148, CL, HG, 32h / Glory Wheel, 12x148, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Handlebar	Alu, 720 mm, Barbore 31.8, Rise 25 mm
Seatpost	Dropper Alpha1, 31,6 mm, remote
Saddle	Selle Royal Sauris
Tyres	Schwalbe Tough Tom, Active Line,

Motor	Bosch Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	PowerTube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Charger Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Green/Red		Silver/Red	
40	0116867800	40	0116867700
46	0116867810	46	0116867710
52	0116867820	52	0116867720



Frame	Alu 29", hydroformed, integrated battery, tapered, Internal routing, Forged interface
Fork	Suntour XCM, 100 mm, Coil
Headset	Acros AZF-576, 1,5", Internal routing
Crankset	FSA, 34T
Rear Derailleur	LT, RD-A12-X, 12s
Shifters Levers	LT, SL-A12-X, 12s
Brakes	Clarks M2, Rotor 180mm/180mm
Cassette	LT, CS-A12, 12s, 11-50T
Pedals	Alu MTB
Front Hub	LRT, ITL, 36h
Rear Hub	LRT, ITL, 36h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu 30,4 mm
Saddle	Selle Royal Sauris
Tyres	Schwalbe Smart Sam, Performance, Addix, 29"x2,35"

Motor	Performance CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 500 Horizontal, frametype, weight 2,8 kg
Charger Type	2 A
Charger Time	Up to 7,5 hours
Max Assisted Speed	25 km/h
Display	PURION
Power	Eco: 60 % Tour: 140 % EMTB: 140 / 340 % Turbo: 340 %

Petroleum/Black

40	0116832205
46	0116832215
50	0116832225



Frame	Alu 29", Hydroformed, Integrated battery, Tapered, External routing, Forged interface, QR
Fork	Zoom 860 AMS, Coil, Lockout, 29", Travel 100 mm, QR
Headset	Acros universal, 1,5", Internal routing
Crankset	FSA 34T
Rear Derailleur	Shimano Deore RD-4120 Shadow Plus, 10s
Shifters Levers	Shimano Deore SL-M4100 Rapidfire Plus, 10s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-M1100, 10s, 11/42
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Alu, Barbore 31.8 mm
Handlebar	Alu, 720 mm, Barbore 31.8, Rise 25 mm
Seatpost	Alu, 31,6 mm
Saddle	Selle Royal Sauris
Tyres	Vittoria Barzo 29"x2.25"
Chaincover	FSA Bash Guard

Motor	Bosch Performance Line 36V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	PowerTube 625 Horizontal, frametype, weight 3,5 kg
Charger Type	4 A
Charger Time	Up to 9 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Light Blue

40	0115328500
46	0115328510



Frame	Alu 29", hydroformed, integrated battery, tapered, Internal routing, Forged interface
Fork	Zoom 860 AMS, 100 mm, Coil, Tapered, Lockout
Headset	Acros AZF-575, 1,5", Internal routing
Crankset	FSA, 34T, Megatooth
Rear Derailleur	Sram SX Eagle
Shifters Levers	Sram SX Eagle Single Click Trigger, 12s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm/180 mm
Cassette	Sram PG1210 Eagle 12s, 11/50
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu 31,6 mm
Saddle	Selle Royal Sauris
Tyres	Schwalbe Tough Tom, Active Line, 29"x2,35"

Motor	AM-80 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 500 Horizontal, frametype, weight 2,9 kg
Charger Type	2 A
Charger Time	Up to 7 hours
Max Assisted Speed	25 km/h
Display	AM LCD full color
Power	Mode 1: 50% Mode 2: 100% Mode 3: 200% Mode 4: 300% Mode 5: 400%

Flat Grey/Neon Red

16" - 42	0116832550
18" - 46	0116832560
18" - 50	0116832570

E-SPORT

Nuestros nuevos cuadros B-Rush 2024 nacen de un proyecto exclusivo para la marca Whistle:

- * Nuevo diseño. El diseño de las formas y la ingeniería de los moldes se realiza a propósito por nuestro personal técnico.
- * Materiales de última generación. La resistencia, la ligereza y el confort están garantizados por la fibra de carbono T700, obtenido a través de procesos de muy alta temperatura y elegido por su alto rendimiento mecánico asociado con bajo peso.
- * Producción inteligente. Producido a través de las tecnologías más modernas en el campo de los materiales compuestos, que permiten optimizar los tiempos de producción de cada cuadro.
- * ¿El resultado? Un producto con prestaciones únicas, capaz de satisfacer a los usuarios más exigentes, en el mejor precio de mercado.



BOSCH



Cabalga hasta la cima y ataca rápidamente los descensos más técnicos a la máxima velocidad. Están contruidos para competiciones pero gracias a las resistentes suspensiones, son ágiles y divertidos incluso en senderos cercanoscasa.





Frame	Alu 29", hydroformed, integrated battery, tapered, Internal routing, Forged interface
Fork	Zoom 860 AMS, 100 mm, Coil, Tapered, Lockout
Headset	Acros AZF-575, 1,5", Internal routing
Crankset	FSA, 34T, Megatooth
Rear Derailleur	Sram SX Eagle
Shifters Levers	Sram SX Eagle Single Click Trigger, 12s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm/180 mm
Cassette	Sram PG1210 Eagle 12s, 11/50
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internalrouting
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu 31,6 mm
Saddle	Selle Royal Sauris
Tyres	Schwalbe Smart Sam, Performance, Addix, 29"x2,35"

Motor	AM-80 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 500 Horizontal, frametype, weight 2.9 kg
Charger Type	2 A
Charger Time	Up to 7 hours
Max Assisted Speed	25 km/h
Display	AM LCD fulcolour
Power	Mode 1: 50% Mode 2: 100% Mode 3: 200% Mode 4: 300% Mode 5: 400%

Anthracite/Black Matt

16" - 40	0115296400
18" - 46	0115296410
20" - 50	0115296420



Frame	Alu 29", hydroformed, integrated battery, tapered, Internal routing, Forged interface
Fork	Zoom 860 AMS, 100 mm, Coil
Headset	Acros AZF-581, 1,5", Internal routing
Crankset	Miranda, 34T
Rear Derailleur	Shimano Altus RD-M2000 SGS, Shadowdow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm/180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	RADIALE L25, eBike Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu 31,6 mm
Saddle	Selle Royal Mach
Tyres	F: Schwalbe Tough Tom, R: Schwalbe Rapid Rob, 29"x2,25"

Motor	AM-80 36 V, 250 W
Max Torque	80 Nm
Sensor Type	Torque
Battery	Powertube 500 Horizontal, frametype, weight 2,9 kg
Charger Type	2 A
Charger Time	Up to 7 hours
Max Assisted Speed	25 km/h
Display	AM LCD
Power	Mode 1: 50% Mode 2: 100% Mode 3: 200% Mode 4: 300% Mode 5: 400%

Anthracite/Black

40	0115296300
46	0115296310
50	0115296320



Frame	Alu 29", hydroformed, integrated battery, tapered, Internal routing, Forged interface
Fork	Suntour XCM, 100 mm, Col
Headset	Acros AZF-581, 1,5", Internal routing
Crankset	Miranda, 34T
Rear Derailleur	LT, RD-V5010-LX, 10s
Shifters Levers	LT, SL-V5010-10, 10s
Brakes	Clarks M2, Rotor 180mm/180mm
Cassette	LT, CS-A7, 10s, 11-46T
Pedals	Alu MTB
Front Hub	LRT, ITL, 36h
Rear Hub	LRT, ITL, 36h
Rims	RADIALE L25, eBike Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu 31,6 mm
Saddle	Selle Royal Mach
Tyres	F: Schwalbe Tough Tom, R: Schwalbe Rapid Rob, 29"x2,25"

Motor	AM-80 36 V, 250 W
Max Torque	80 Nm
Sensor Type	Torque
Battery	Powertube 500 Horizontal, frametype, weight 2,9 kg
Charger Type	2 A
Charger Time	Up to 7 hours
Max Assisted Speed	25 km/h
Display	AM LCD
Power	Mode 1: 50% Mode 2: 100% Mode 3: 200% Mode 4: 300% Mode 5: 400%

Anthracite/Black	
40	0115296452
46	0115296452

E-TREKKING



BOSCH



Con las nuevas bicicletas eléctricas de trekking son posibles recorridos en bicicleta que antes eran inimaginables.

Con un motor eléctrico compacto y a menudo muy bien integrado ofrecen mucha potencia adicional cada vez que pedalea.

Por regla general, es posible regular el nivel de soporte para el motor eléctrico durante la marcha en función de las necesidades.

Además, al igual que con las bicicletas de trekking normales, se puede contar con un amplio equipamiento con iluminación, guardabarros y una posición de asiento adecuada para los largos recorridos. Los frenos de disco son un sello claro de aprobación para cada bicicleta eléctrica de trekking.





Frame	Full Carbon 29", Toray T700, dual integrated battery, oversize head tube, 12x148 mm E-Thru
Fork	Full Carbon 29", Toray T700, dual integrated battery, oversize head tube, 12x148 mm E-Thru
Headset	Acros AZF-576, 1,5", Internal routing
Crankset	FSA 38T, Megatooth
Rear Derailleur	Sram SX Eagle
Shifters Levers	Sram SX Eagle Single Click Trigger, 12s
Brakes	Shimano BR-MT420, Four piston, Rotor SM-RT30 203 mm / 203 mm
Cassette	Sram PG1210 Eagle 12s, 11/50
Pedals	Alu MTB
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT410, 12x148, CL, HG, 32h
Rims	RADIALE X25, eDesign Asymmetric, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handelbar	Alu Low Rise, 720 mm
Seapost	Alu 31,6 mm
Saddle	Selle Royal Essenza
Tyres	Schwalbe Smart Sam, K-Guard, 29"x2,35"

Motor	Performance CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 500 h & Powertube 625 h
Charger Type	2 A
Charger Time	Up to 9,4 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 60 % Tour: 140 % EMTB: 140 / 340 % Turbo: 340 %

Man: Black/Anthracite Matt
48
0116832915



Frame	Full Carbon 29", Toray T700, dual integrated battery, oversize head tube, 12x148 mm E-Thru
Fork	Zoom 860S, Travel 100 mm, Coil, Lockout
Headset	Acros AZF-575, 1,5", Internal routing
Crankset	FSA 38T, Megatooth
Rear Derailleur	Shadow Plus Sram SX 12 vel
Shifters Levers	Rapidfire-Plus, 10 Sram SX 12 vel
Brakes	Shimano CS-M4100 10s 11/46
Cassette	Shimano CS-M1100 10s 11/46
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano Alivio MT400, 12x148, CL, HG, 32h
Rims	RADIALE X25, eDesign Asymmetric, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 31,6 mm
Saddle	Atala Trekking
Tyres	Schwalbe Tough Tom K-Guard, 57-622"

Motor	Performance CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 625
Charger Type	4 A
Charger Time	Up to 9,4 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 60 % Tour: 140 % EMTB: 140 / 340 % Turbo: 340 %

MAN: Black/ Green

48	0116851917
52	0116851927



Frame	Alu 700C, Hydroformed, internal battery, custom tubing, Internal routing, Forged interface
Fork	Suntour NEX-E25, 63 mm, Coil, Lockout
Headset	Acros AZF-585, 1,5", Internal routing
Cranckset	FSA 38T
Rear Derailleur	Shimano Alivio RD-M3100 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Shifters Levers	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu TTK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	Radiale L25V, 25x622, eBike ready
Stem	Satori Python, 31,8 mm, Adjustable, Internal routing
Handlebar	Satori Noirette City, 630 mm
Seatpost	Satori Harmony, Suspended, 31,6 mm
Saddle	Atala Memory Foam Trekking
Tyres	Schwalbe Energizer Active Plus, Greenguard, TwinSkin, 700x50c

Motor	Performance Cruise 36 V, 250W
Max Torque	65 Nm36 V, 250W
Sensor Type	Torque
Battery	Powertube 500 Horizontal, frametype, weight 2,8kg
Charger Type	2 A
Charger Time	Up to 7,5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 55 % Tour: 120 % Sport: 200 % Turbo: 300 %

Man: Grey/Blue

50 0115307700

LADY: Blue/ Anthracite

45 0115307800



Frame	Alu 700C, hydroformed, internal powerpack, custom tubing, Internal routing, Forged interface
Fork	Suntour NEX-E25, 63 mm, Coil
Headset	Acros AZF-585, 1,5", Internal routing
Crankset	Miranda, 38T
Rear Derailleur	Shimano Alivio RD-M3100 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm/180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	Radiale L25V, 25x622, eBike ready
Stem	Satori Python, 31,8 mm, Adjustable, Internal routing
Handlebar	Satori Noirette City, 630 mm
Seatpost	Satory Harmony, suspended 31,6 mm
Saddle	Atala Memory Foam Trekking
Tyres	Schwalbe Energizer Active Plus, Punctureguard, TwinSkin, 700x50C

Motor	Active Plus 36 V, 250 W
Max Torque	50 Nm
Sensor Type	Torque
Battery	Powertube 400 Horizontal, frametype, weight 2,5 kg
Charger Type	2 A
Charger Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	PURION
Power	Eco: 40 % Tour: 100 % Sport: 180 % Turbo: 270 %

White/Pastel grey Matt

45	0115297600
50	0115297610



Frame	Alu 700C, hydroformed, internal powerpack, custom tubing, Internal routing, Forged interface
Fork	Suntour NEX, 63 mm, Coil
Headset	Acros AIX-540, 1,5", Internal routing
Crankset	Miranda, 38T
Rear Derailleur	Shimano RD-TY500D
Shifters Levers	Shimano Tourney SL-RS36, Revoshift, 7s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm/180 mm
Cassette	Shimano CS-HG200 7s 12/32
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	Radiale L25V, 25x622, eBike ready
Stem	Alu, ahead, adjustable, 31,8 mm
Handlebar	Alu City, 640 mm
Seatpost	Alu, 31,6 mm
Saddle	Atala Memory Foam Trekking
Tyres	Schwalbe Energizer Active Plus, Punctureguard, TwinSkin, 700x50C

Motor	Active 36 V, 250 W
Max Torque	40 Nm
Sensor Type	Torque
Battery	Powertube 400 Horizontal, frametype, weight 2,5 kg
Charger Type	2 A
Charger Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	PURION
Power	Eco: 40 % Tour: 100 % Sport: 170 % Turbo: 250 %

Green/Antrracite Matt

45	0115297600
50	0115297610
53	0115297620

E-URBAN



BOSCH

¿Transformar el trayecto entre casa y el trabajo en una oportunidad para realizar actividad física y mantenerse en forma? ¿Entrar más fácilmente a la ciudad desde las afueras, dejando atrás el tráfico? ¿O llegar a cualquier punto del centro de la ciudad sin tener que preocuparse por las zonas de tráfico restringido?

Cualquiera que haya decidido confiar en las dos ruedas para desplazarse por la ciudad ya conoce estas y otras ventajas de la bicicleta.

Si también te estás planteando la compra de una bicicleta urbana, el catálogo de Atala está repleto de propuestas, evidentemente todas caracterizadas por el mismo habitual que dedicamos a cada fase de diseño y construcción.





Frame	Alu 700C, Integrated battery, Tapered, Monotube
Fork	Zoom 860 AMS
Headset	Acros AICR 1.5
Crankset	FSA Mega Tooth 38T
Rear Derailleur	Shimano Deore RD-M4120 SGS, Shadow
Shifters Levers	Shimano Deore SL-M4100-Rapidfire, 10s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-M4100-10 10s 11/46
Pedals	Alu MTB Full
Front Hub	Shimano HB-TX505, CL, 32h
Rear Hub	Shimano HB-MT400-B, CL, HG, 32h
Rims	Radiale E25, 25x584, 32h ebike ready
Stem	Satori Phytan 31,8mm, Adjustable, Internal Routing
Handlebar	Kalloy HB-RB11L, 720 mm
Saddle	Selle RoyalS auris
Tyres	Schwalbe Smart Sam Performance Addix 27,5"x2,25

Motor	Bosch Performance CX 36V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 625 Horizontal, weight 3,5 kg
Charger Type	2 A
Charger Time	Up to 9 hours
Max Assisted Speed	25 km/h
Display	PURION
Power	Eco: 6.0% Tour: 14.0% EMTB: 140/340% Turbo: 340%

Black/Anthracite

50

0116851610



Frame	Alu 700C, hydroformed, easy access, integrated battery, custom tubing, Internal routing, Forged interface
Fork	Zoom 188D NS, Travel 65 mm, Coil, Lockout
Headset	Acros AZF-585, 1,5", Internal routing
Crankset	Miranda, 38T
Rear Derailleur	Shimano Alivio RD-M3100 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Clarks M2, Rotor XLC 180mm/180mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	Radiale L25V, 25x622, eBike ready
Stem	Satori Python, 31,8 mm, Adjustable, Internal routing
Handlebar	Satori Noirette City, 630mm
Seatpost	Satori Harmony, Suspended, 31,6 mm
Saddle	Atala Memory Foam City
Tyres	Vittoria Randonneur, 700x47

Motor	Bosch Performance Cruise 36V, 250 W
Max Torque	65 Nm
Sensor Type	Torque
Battery	Powertube 400 Horizontal, frametype, weight 2,8 kg
Charger Type	2 A
Charger Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 55 % Tour: 120 % Sport: 200 % Turbo: 300 %

Green /Anthracite Matt

45

0115297802



Frame	Alu 700C, hydroformed, easy access, internal powerpack, custom tubing, Internal routing, Forged interface
Fork	Zoom 188D NS, Travel 65 mm, Coil, Lockout
Headset	Acros AZF-585, 1,5", Internal routing
Crankset	Miranda, 38T
Rear Derailleur	LT, RD-V5010-LX, 10s
Shifters Levers	LT, SL-V5010-10, 10s
Brakes	Clarks M2, Rotor 180mm/180mm
Cassette	LT, CS-A7, 10s, 11-46T
Pedals	Alu TKK
Front Hub	LRT, ITL, 36h
Rear Hub	LRT, ITL, 36h
Rims	Radiale L25V, 25x622, eBike ready
Stem	Satori Python, 31,8 mm, Adjustable, Internal routing
Handlebar	Satori Noirette City, 630 mm
Seatpost	Alu 31,6 mm
Saddle	Atala Memory Foam City
Tyres	Schwalbe Energizer Active Plus, Punctureguard, TwinSkin, 700x50C

Motor	Bosch Active Plus 36V, 250 W
Max Torque	50 Nm
Sensor Type	Torque
Battery	Powerpack 400, frametype, weight 2,5 kg
Charger Type	2 A
Charger Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	PURION
Power	Eco: 40 % Tour: 100 % Sport: 180 % Turbo: 270 %

Black /Grey Matt

45 0115297902



Frame	Alu 700C, hydroformed, easy access, custom tubing, Internal routing, Forged interface
Fork	Zoom 187D, Travel 65 mm, Coil
Headset	Acros AZF-585, 1,5", internal routing
Crankset	Miranda, 38T
Rear Derailleur	LT, RD-V5010-LX, 10s
Shifters Levers	LT, SL-V5010-10, 10s
Brakes	Clarks M2, Rotor 180mm/180mm
Cassette	LT, CS-A7, 10s, 11-46T
Pedals	Alu TKK
Front Hub	Formula CL-51, QR, CL, 32h
Rear Hub	Formula CL-52, QR, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Python, 31,8 mm, Adjustable, internal routing
Handlebar	Satori Noirette City, 630mm
Seatpost	Alu 30,9 mm
Saddle	Atala Memory Foam City
Tyres	Vittoria Randonneur, 700x47
Mudguards	SKS A60S
Chaincover	SKS Chainbow
Carriers	Alu, without brackets
External Lights	F: Herrmans MR GO - 120 lumen R: Axa BlueLine LED Lightguide

Motor	Bosch Active Plus 36V, 250 W
Max Torque	50 Nm
Sensor Type	Torque
Battery	Powerpack 400, frametype, weight 2,5 kg
Charger Type	2 A
Charger Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	PURION
Power	Eco: 40 % Tour: 100 % Sport: 180 % Turbo: 270 %

White/Dark Red

47	0115298005
50	0115298015



Frame	Alu. Hydroformed 700c, easy access internal battery, internal cable
Fork	Suntour NEX 700c, alu with alu crown 63mm travel
Headset	FSA integrated ahead 1 1/8
Crankset	Alu 170mm, FSA 38T
Rear Derailleur	Shimano Altus RD-M310
Shifters Levers	Shimano Tourney SL-RV400 RevoShift,
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 160 mm CL
Cassette	Shimano HG200 7s 12/32
Pedals	Resin antislip
Hub	Shimano TX505, CL, 32h, quick release
Rims	Radiale E25 700c, double wall, 32h,disc
Stem	Au over, ahead, adjustable
Handlebar	Alu over TKK, 640mm, rise 25mm
Seatpost	Selle Royal Aurorae w/elastomer
Saddle	Selle Royal Auroræ
Tyres	Byte Trento 700x45c, with reflecting line
Chaincover	L type, edge
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	Agile Gen2 CAN 36 V, 250W
Max Torque	100 Nm
Sensor Type	Torque
Battery	Phyllion Li-Ion 36V, 522Wh,inside frame, with Smart BMS CAN
Charger Type	2 A Europlug
Charger Time	100%: 7h:45m / 80%: 5h48m
Max Assisted Speed	25 km/h
Display	Atala A23 LCD CAN, side
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Function	Walking assistance External light control Speed information Power Information Battery information

Ice White 28"

45

0115311500

Ultralight 26"

45

0115311600



Frame	Alu 20", foldable, with integrated battery
Fork	Hi-Ten Tig 26"
Headset	Integrated 1"1/8, threaded, with cap
Crankset	AM80 alu 152mm, FSA 44T
Rear Derailleur	Shimano Tourney RD-TY500
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 160 mm CL
Cassette	Shimano HG200 7s 12-32
Pedals	Resin foldable
Front Hub	Shimano TX505 32h, CL, quick release
Rims	Rodi 20", double wall w/eylets, 32h, disc
Stem	Alu, foldable, adjustable
Handlebar	Alu, 30mm rise
Seatpost	Alu with clamp, 34,9mm, telescopic
Saddle	Selle Royal Lancia
Tyres	Schwalbe Big Apple 20"x2,00", with reflecting line, puncture proof
Mudguards	Single stay speedy
Chaincover	Plastic, L type
Carriers	Alu rear carrier with spring

External Lights Axa front (15 lux) and rear LED, controlled by display

Motor	AM80 Agile CAN, 36V 250W
Max Torque	80 Nm
Sensor Type	Torque
Battery	Li-Ion 36V, 313Wh, inside down tube, with BMS
Charger Type	2A
Charger Time	100%: 7h30m / 80%: 3h52m
Max Assisted Speed	25 km/h
Display	Atala A15 LED CAN, Power +/-
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%

Ultralight / Neon Matt

33

0115289300



Frame	Alu. 700c, easy access, integrated battery, integrated HT, disc brake, internal cables
Fork	Suntour NEX 700c, alu with alu crown, 63mm
Headset	FSA integrated 1"1/8
Crankset	Byte alu 42T cartridge
Rear Derailleur	Shimano Altus RD-M310
Shifters Levers	Shimano Tourney SL-RS45 RevoShift, 8s
Brakes	Hydraulic disk, Rotor 160 mm, with brake lever switch
FreeWheel	DNP 8s 13-28
Pedals	Resin Antislip
Hub	Shimano quick release front, motor on rear, 36h, INT
Rims	Beretta 700c, double wall w/eylets, 36h, disc
Stem	Byte alu over, ahead, adjustable
Handlebar	Byte alu over TKK, 640mm, rise 25mm
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Aurorae w/elastomer
Tyres	Byte Trento 700x45c, reflecting line
Mudguards	Single stay speedy
Chaincover	Plastic L type
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (15 lux) and rear LED, controlled by display and twilight sensor

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	45 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 540Wh, inside the frame, Samsung cells with Smart BMS CAN
Charger Type	2 A Europlug
Charger Time	100%: 8h:50m / 80%: 6h40m
Max Assisted Speed	25 km/h
Display	Atala A10 LCD Smart CAN, with remote control
Power	5 levels, Speed/Torque adjust

Blue/Grey Matt

45

0115314700



Frame	Alu. 700c, internal cables
Fork	Hi-Ten Tig 700c
Headset	Steel 1 1/8, threaded, with cap
Crankset	Byte steel 42T cartridge, with cap
Rear Derailleur	Shimano Tourney RD-TY300
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin City
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 700c, double wall w/eylets, 36h
Stem	Byte alu, adjustable
Handlebar	Byte steel TKK
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Trento 700x45c
Mudguards	Single stay speedy
Chaincover	Plastic, L type
Carriers	Battery rear carrier with spring, 25kg / front carrier

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Phyllion Li-Ion 36V, 518Wh, under carrier, with Smart BMS, integrated rear light
Charger Type	2A Europlug
Charger Time	100%: 7h30m / 80%: 5h40m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust

White / Red	
45	0115301500

External Lights Axa front (15 lux) and rear LED on battery, controlled by display



Frame	Alu. 26", easy access, internal cables
Fork	Hi-Ten Tig 700c
Headset	Steel 1 1/8, threaded, with cap
Crankset	Byte steel 42T cartridge, with cap
Rear Derailleur	LT7 Tourney RD-TY300
Shifters Levers	LT7 Tourney SL-RS35 RevoShift, 7s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin City
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 700c, double wall w/eylets, 36h
Stem	Byte alu, adjustable
Handlebar	Byte steel TKK
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Garda 26"x1,75"
Mudguards	Single stay speedy
Chaincover	Plastic, L type
Carriers	Battery rear carrier with spring, 25kg / front carrier

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Phyllion Li-Ion 36V, 518Wh, under carrier, with Smart BMS, integrated rear light
Charger Type	2A Europlug
Charger Time	100%: 7h30m / 80%: 5h40m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust

Ultralight / Anthracite	White / Blue
45 0115301400	45 0115301450

External Lights Axa front (15 lux) and rear LED on battery, controlled by display



Frame	Alu. 26", easy access, internal cables
Fork	Hi-Ten Tig 26"
Headset	Steel 1 1/8, threaded, with cap
Crankset	Byte steel 42T cartridge, with cap
Rear Derailleur	Shimano Tourney RD-TY300
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin City
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 26" alu, double wall w/eylets,
Stem	Byte alu, adjustable
Handlebar	Byte steel City
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Garda 26"x1,75"
Mudguards	Single stay speedy
Chaincover	Plastic, L type
Carriers	Battery rear carrier with spring, 25kg / front carrier

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Phyllion Li-Ion 36V, 360Wh, under carrier, with Smart BMS, integrated rear light
Charger Type	2A Europlug
Charger Time	100%: 6h4m / 80%: 4h27m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust

Blue / Champagne Matt		White / Red	
45	0115301605	45	0115301650

External Lights Axa front (15 lux) and rear LED on battery, controlled by display



Frame	Alu. 26", easy access, internal cables
Fork	Hi-Ten Tig 26"
Headset	Steel 1 1/8, threaded, with cap
Crankset	Byte steel 42T cartridge, with cap
Rear Derailleur	Shimano Tourney RD-TZ500
Shifters Levers	Shimano Tourney SL-RS36 RevoShift, 6s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 6s 14-28
Pedals	Resin City
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 26" alu, double wall w/eylets,
Stem	Byte alu, adjustable
Handlebar	Byte steel City
Seatpost	Alu, 25,4mm
Saddle	Selle Royal Wave
Tyres	Byte Garda 26"x1,75"
Mudguards	Single stay speedy
Chaincover	Steel painted, L type
Carriers	Battery rear carrier with spring, 25kg / front carrier
External Lights	Front and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 360Wh, behind seat tube, with BMS
Charger Type	2A Europlug
Charger Time	100%: 6h4m / 80%: 4h27m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust

White / Neon Green

45

0115290604



Frame	Hi-Ten Tig 24", easy access, integratd HT, internal cables
Fork	Hi-Ten Tig 24"
Headset	Integrated 1 1/8, threaded, with cap
Crankset	Byte steel 42T cartridge, with cap
Rear Derailleur	Shimano Tourney RD-TZ500
Shifters Levers	Shimano Tourney SL-RS36 RevoShift, 6s
Brakes	Promax alu, Cruiser V-Brake, E-Bile pads with brake lever switch
Cassette	Shimano Tourney 6s 14-28
Pedals	Resin city
Hub	Shimano quick release front, motor on rear, 36h, INT
Rims	Rodi 24" 25c alu, double wall w/eylets
Stem	Alu
Handlebar	Byte steel City, 600mm, rise 60mm
Seatpost	Alu, 25,4mm
Saddle	Selle Royal Wave
Tyres	CST 24"x2,40" City
Chaincover	Steel painted, L type

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulse
Battery	Li-Ion 36V, 360Wh, behind seat tube, with BMS
Charger Type	2 A Europlug
Charger Time	100%: 6h:4m / 80%: 4h27m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/ Torque adjust

Other Function Walking assistance
External light control

Anthracite

45

0115314500

External Lights Axa front (15 lux) and rear LED, controlled by display



Frame	Alu 20" FAT, foldable, integrated HT, disc brake
Fork	Susp 45mm 20"x4", alu crown, with mechanical lockout
Headset	FSA integrated 1"1/8
Crankset	Alu 170mm, 42T, cartridge
Rear Derailleur	Shimano Tourney RD-FT35D
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Hydraulic disk, Rotor 180 mm, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin foldable
Hub	Alu 36h, axle 135 F/175 R, motor on rear
Rims	20" alu, double wall, 36h
Stem	Alu, foldable, adjustable
Handlebar	Byte steel City
Seatpost	Alu with clamp, 33,9 mm
Saddle	Selle Royal Wave
Tyres	20"x4"
Mudguards	Steel painted
Chaincover	Paracatena
Carriers	Alu rear carrier custom, 25kg
External Lights	Axa front (30Lux) and rear LED, controlled by display

Motor	Bafang brushless 36V 250W, on rear hub
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 522Wh, inside the frame
Charger Type	2A Europlug
Charger Time	100%: 10h14m / 80%: 7h47m
Max Assisted Speed	25 km/h
Display	LCD, Power +/-

Black / Anthracite
45

0115301700



Frame	Alu 20" FAT, foldable, integrated HT, disc brake
Fork	Susp 45mm 20"x4", alu crown, whith mechanical lockout
Headset	FSA integrated 1"1/8
Crankset	Alu 170mm, 42T, cartridge
Rear Derailleur	Shimano Tourney RD-FT35D
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Hydraulic disk, Rotor 160 mm, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin foldable
Hub	Alu 36h, axle 135 F/175 R, motor on rear
Rims	20" alu, double wall, 36h
Stem	Alu, foldable, adjustable
Handlebar	Alu, 20mm rise
Seatpost	Alu with clamp, 27,2mm, 400mm
Saddle	Selle Royal Wave
Tyres	20"x4"
Mudguards	Steel painted
Chaincover	Paracatena
Carriers	Alu integrato al Frame

External Lights Spanninga front (16Lux) and rear LED, controlled by display

Motor	Bafang brushless 36V 250W, on rear hub
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 522Wh, Samsung cells behind seat tube, with BMS / Li-Ion 36V, 540Wh, behind seat tube, with BMS
Range	Up to 100 km
Charger Type	2A Europlug
Charger Time	100%: 10h14m / 80%: 7h47m 100%: 8h50m / 80%: 6h40m
Max assisted speed	25 km/h
Display	LCD, Power +/-

Black/Neon Yellow Matt

43 0115312700

Neon Green/Black Matt

43 0115312705



Frame	Alu 20", foldable, with integrated battery
Fork	Hi-Ten Tig 20"
Headset	Integrated 1"1/8, threaded, with cap
Crankset	Byte alu 152mm, 42T, cartridge
Rear Derailleur	Shimano Tourney RD-TF35
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin foldable
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 20" alu, double wall, 36h
Stem	Alu, foldable, adjustable
Handlebar	Alu, 20mm rise
Seatpost	Alu with clamp, 34mm, 500mm long
Saddle	Selle Royal Mach
Tyres	20"x1,75"
Mudguards	Single stay speedy
Chaincover	Plastic, L type
Carriers	Alu rear carrier with spring

External Lights Front and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 313Wh, inside down tube, with BMS
Charger Type	2A Europlug
Charger Time	100%: 5h20m / 80%: 3h52m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust

Black / Neon Green Matt

33

0115290800





DISTRIBUYE

POUS

POWER TO YOUR SHOP

CTRA. MONTMELÓ 56-58 · 08403 GRANOLLERS (BARCELONA)
TEL.: 935 689 200 · FAX: 935 689 924 · COMERCIAL@POUS.NET